


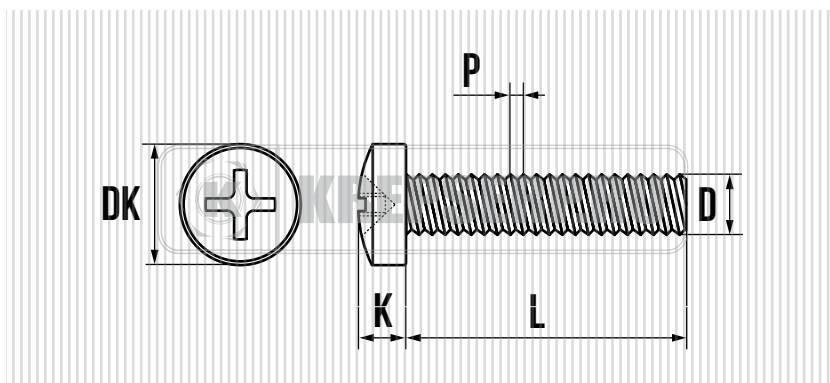

ВИНТ С ПОЛУКРУГЛОЙ ГОЛОВКОЙ DIN 7985

**ХАРАКТЕРИСТИКИ:**

- DIN 7985
- СТАЛЬ
- ПОЛУКРУГЛАЯ ГОЛОВКА
- ЦИНКОВОЕ ПОКРЫТИЕ

ПРИМЕНЕНИЕ

СОЗДАНИЕ РАЗЪЕМНОГО РЕЗЬБОВОГО СОЕДИНЕНИЯ ДЕТАЛЕЙ И КОНСТРУКЦИЙ В МАШИНОСТРОЕНИИ, ПРИБОРОСТРОЕНИИ И МЕБЕЛЬНОЙ ПРОМЫШЛЕННОСТИ.

D мм.	L мм.	DK мм.	K мм.	P мм.
2.5	4	5.0	2.0	0.45
2.5	5	5.0	2.0	0.45
2.5	6	5.0	2.0	0.45
2.5	8	5.0	2.0	0.45
2.5	12	5.0	2.0	0.45
2.5	16	5.0	2.0	0.45
3.0	4	6.0	2.4	0.5
3.0	5	6.0	2.4	0.5
3.0	6	6.0	2.4	0.5
3.0	8	6.0	2.4	0.5
3.0	10	6.0	2.4	0.5
3.0	12	6.0	2.4	0.5
3.0	14	6.0	2.4	0.5
3.0	16	6.0	2.4	0.5
3.0	18	6.0	2.4	0.5
3.0	20	6.0	2.4	0.5
3.0	25	6.0	2.4	0.5
3.0	30	6.0	2.4	0.5
3.0	35	6.0	2.4	0.5
4.0	4	8.0	3.1	0.7
4.0	5	8.0	3.1	0.7
4.0	6	8.0	3.1	0.7
4.0	8	8.0	3.1	0.7
4.0	10	8.0	3.1	0.7
4.0	12	8.0	3.1	0.7
4.0	14	8.0	3.1	0.7
4.0	16	8.0	3.1	0.7
4.0	18	8.0	3.1	0.7
4.0	20	8.0	3.1	0.7
4.0	22	8.0	3.1	0.7
4.0	25	8.0	3.1	0.7
4.0	30	8.0	3.1	0.7
4.0	35	8.0	3.1	0.7
4.0	40	8.0	3.1	0.7
4.0	45	8.0	3.1	0.7
4.0	50	8.0	3.1	0.7
4.0	55	8.0	3.1	0.7
4.0	60	8.0	3.1	0.7
4.0	70	8.0	3.1	0.7
4.0	80	8.0	3.1	0.7

D мм.	L мм.	DK мм.	K мм.	P мм.
5.0	6	10.0	3.8	0.8
5.0	8	10.0	3.8	0.8
5.0	10	10.0	3.8	0.8
5.0	12	10.0	3.8	0.8
5.0	14	10.0	3.8	0.8
5.0	16	10.0	3.8	0.8
5.0	18	10.0	3.8	0.8
5.0	20	10.0	3.8	0.8
5.0	22	10.0	3.8	0.8
5.0	25	10.0	3.8	0.8
5.0	30	10.0	3.8	0.8
5.0	35	10.0	3.8	0.8
5.0	40	10.0	3.8	0.8
5.0	45	10.0	3.8	0.8
5.0	50	10.0	3.8	0.8
5.0	55	10.0	3.8	0.8
5.0	60	10.0	3.8	0.8
5.0	70	10.0	3.8	0.8
5.0	80	10.0	3.8	0.8
5.0	90	10.0	3.8	0.8
6.0	8	12.0	4.6	1.0
6.0	10	12.0	4.6	1.0
6.0	12	12.0	4.6	1.0
6.0	14	12.0	4.6	1.0
6.0	16	12.0	4.6	1.0
6.0	18	12.0	4.6	1.0
6.0	20	12.0	4.6	1.0
6.0	22	12.0	4.6	1.0
6.0	25	12.0	4.6	1.0
6.0	30	12.0	4.6	1.0
6.0	35	12.0	4.6	1.0
6.0	40	12.0	4.6	1.0
6.0	45	12.0	4.6	1.0
6.0	50	12.0	4.6	1.0
6.0	55	12.0	4.6	1.0
6.0	60	12.0	4.6	1.0
6.0	65	12.0	4.6	1.0
6.0	70	12.0	4.6	1.0
6.0	80	12.0	4.6	1.0
6.0	90	12.0	4.6	1.0
6.0	100	12.0	4.6	1.0



KREPSERP.RU

МАГАЗИН СТРОИТЕЛЬНОГО КРЕПЕЖА, ИНСТРУМЕНТА

8 (499) 390 79 09, 8 (926) 848 50 50
INFO@KREPSERP.RU

D мм.	L мм.	DK мм.	K мм.	P мм.
8,0	10	16,0	6,0	1,25
8,0	12	16,0	6,0	1,25
8,0	16	16,0	6,0	1,25
8,0	20	16,0	6,0	1,25
8,0	25	16,0	6,0	1,25
8,0	30	16,0	6,0	1,25
8,0	35	16,0	6,0	1,25
8,0	40	16,0	6,0	1,25
8,0	45	16,0	6,0	1,25
8,0	50	16,0	6,0	1,25
8,0	55	16,0	6,0	1,25
8,0	60	16,0	6,0	1,25
8,0	70	16,0	6,0	1,25
8,0	80	16,0	6,0	1,25
8,0	90	16,0	6,0	1,25
8,0	100	16,0	6,0	1,25