


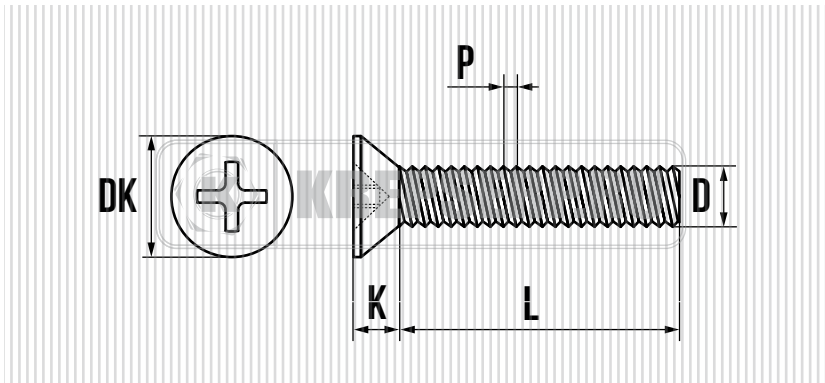

# ВИНТ С ПОТАЙНОЙ ГОЛОВКОЙ DIN 965

**ХАРАКТЕРИСТИКИ:**

- DIN 965
- СТАЛЬ
- ПОТАЙНАЯ ГОЛОВКА
- ЦИНКОВОЕ ПОКРЫТИЕ

## ПРИМЕНЕНИЕ

СОЗДАНИЕ РАЗЪЕМНОГО РЕЗЬБОВОГО СОЕДИНЕНИЯ ДЕТАЛЕЙ И КОНСТРУКЦИЙ В СТРОИТЕЛЬСТВЕ И МЕБЕЛЬНОМ ПРОИЗВОДСТВЕ.

D мм.	L мм.	DK мм.	K мм.	P мм.
2.5	5	4.7	1.5	0.45
2.5	6	4.7	1.5	0.45
2.5	8	4.7	1.5	0.45
2.5	10	4.7	1.5	0.45
2.5	16	4.7	1.5	0.45
2.5	25	4.7	1.5	0.45
3.0	6	5.6	1.65	0.5
3.0	8	5.6	1.65	0.5
3.0	10	5.6	1.65	0.5
3.0	12	5.6	1.65	0.5
3.0	16	5.6	1.65	0.5
3.0	20	5.6	1.65	0.5
3.0	30	5.6	1.65	0.5
3.0	35	5.6	1.65	0.5
3.0	40	5.6	1.65	0.5
3.0	45	5.6	1.65	0.5
3.0	50	5.6	1.65	0.5
4.0	6	7.5	2.2	0.7
4.0	8	7.5	2.2	0.7
4.0	10	7.5	2.2	0.7
4.0	12	7.5	2.2	0.7
4.0	16	7.5	2.2	0.7
4.0	18	7.5	2.2	0.7
4.0	20	7.5	2.2	0.7
4.0	25	7.5	2.2	0.7
4.0	30	7.5	2.2	0.7
4.0	35	7.5	2.2	0.7
4.0	40	7.5	2.2	0.7
4.0	45	7.5	2.2	0.7
4.0	50	7.5	2.2	0.7
4.0	55	7.5	2.2	0.7
4.0	60	7.5	2.2	0.7
4.0	65	7.5	2.2	0.7
4.0	70	7.5	2.2	0.7
4.0	75	7.5	2.2	0.7
4.0	80	7.5	2.2	0.7
5.0	6	9.2	2.5	0.8
5.0	8	9.2	2.5	0.8
5.0	10	9.2	2.5	0.8
5.0	12	9.2	2.5	0.8
5.0	14	9.2	2.5	0.8

D мм.	L мм.	DK мм.	K мм.	P мм.
5.0	16	9.2	2.5	0.8
5.0	20	9.2	2.5	0.8
5.0	25	9.2	2.5	0.8
5.0	30	9.2	2.5	0.8
5.0	35	9.2	2.5	0.8
5.0	40	9.2	2.5	0.8
5.0	45	9.2	2.5	0.8
5.0	50	9.2	2.5	0.8
5.0	55	9.2	2.5	0.8
5.0	60	9.2	2.5	0.8
5.0	65	9.2	2.5	0.8
5.0	70	9.2	2.5	0.8
5.0	75	9.2	2.5	0.8
5.0	80	9.2	2.5	0.8
5.0	85	9.2	2.5	0.8
5.0	90	9.2	2.5	0.8
5.0	95	9.2	2.5	0.8
5.0	100	9.2	2.5	0.8
6.0	10	11.0	3.0	1.0
6.0	12	11.0	3.0	1.0
6.0	14	11.0	3.0	1.0
6.0	16	11.0	3.0	1.0
6.0	20	11.0	3.0	1.0
6.0	25	11.0	3.0	1.0
6.0	30	11.0	3.0	1.0
6.0	35	11.0	3.0	1.0
6.0	40	11.0	3.0	1.0
6.0	45	11.0	3.0	1.0
6.0	50	11.0	3.0	1.0
6.0	55	11.0	3.0	1.0
6.0	60	11.0	3.0	1.0
6.0	65	11.0	3.0	1.0
6.0	70	11.0	3.0	1.0
6.0	75	11.0	3.0	1.0
6.0	80	11.0	3.0	1.0
6.0	85	11.0	3.0	1.0
6.0	90	11.0	3.0	1.0
6.0	100	11.0	3.0	1.0
8.0	16	14.5	4.65	1.25
8.0	20	14.5	4.65	1.25
8.0	25	14.5	4.65	1.25
8.0	30	14.5	4.65	1.25

**KREPSERP.RU**

МАГАЗИН СТРОИТЕЛЬНОГО КРЕПЕЖА, ИНСТРУМЕНТА

8 (499) 390 79 09, 8 (926) 848 50 50  
INFO@KREPSERP.RU

D мм.	L мм.	DK мм.	K мм.	P мм.
8,0	35	14,5	4,65	1,25
8,0	40	14,5	4,65	1,25
8,0	45	14,5	4,65	1,25
8,0	50	14,5	4,65	1,25
8,0	60	14,5	4,65	1,25
8,0	70	14,5	4,65	1,25
8,0	80	14,5	4,65	1,25
8,0	90	14,5	4,65	1,25
8,0	100	14,5	4,65	1,25
10,0	20	18,0	5,0	1,5
10,0	25	18,0	5,0	1,5
10,0	30	18,0	5,0	1,5
10,0	35	18,0	5,0	1,5
10,0	40	18,0	5,0	1,5
10,0	45	18,0	5,0	1,5
10,0	50	18,0	5,0	1,5
10,0	60	18,0	5,0	1,5
10,0	70	18,0	5,0	1,5